

VPOWER HOLDINGS LIMITED

HKEx Stock Code: 1608

VGS3300 DIESEL GENERATOR SET


TECHNICAL DESCRIPTION

MTU 20V4000G63L

For PRIME and STANDBY Application

50Hz 1500RPM

powered by

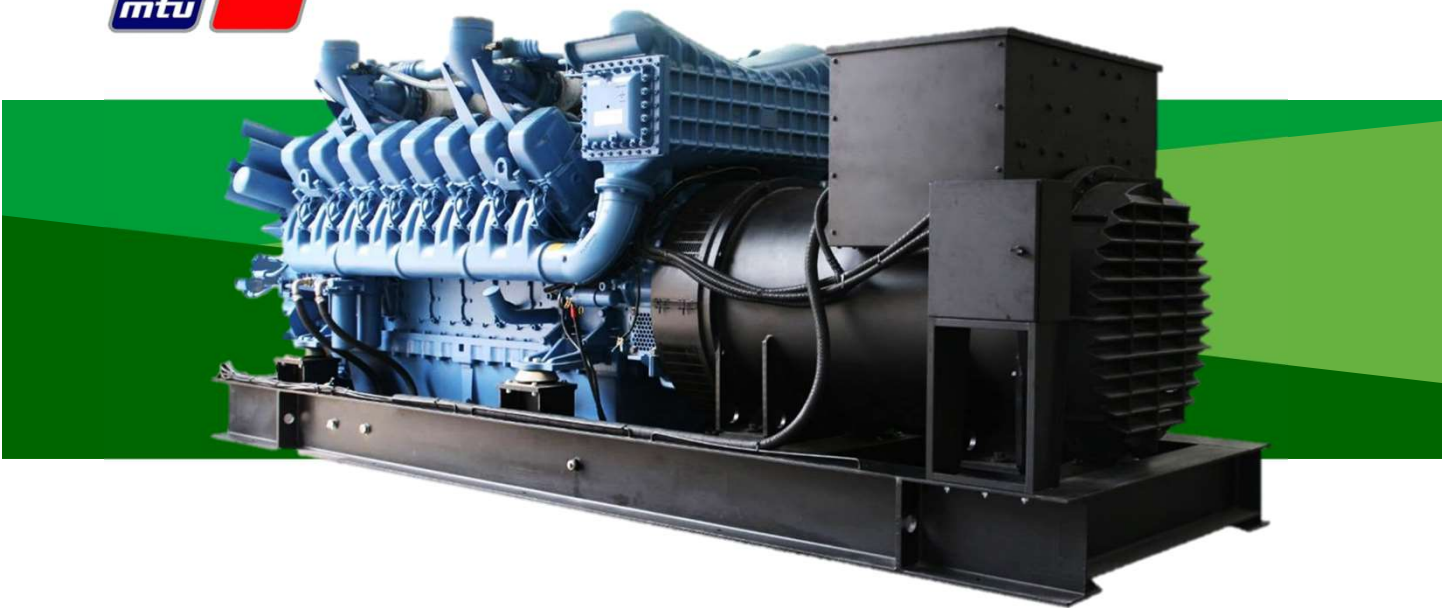

50Hz at 0.8 Power Factor 380 - 400V 3-Phase Rated Voltage

PRIME
2400kWe / 3000kVA

STANDBY
2640kWe / 3300kVA

GENERATOR SET PERFORMANCE

Application

A factory designed generator set equipped with a standard AC/DC generator control panel. The generator set is ready to be connected to your fuel and power line to start up once the installation completed.

Applicable Definitions

Standby: Designed for emergency backup system. The standby rating is applicable to varying loads for the duration of a power outage, No overload capability and average Load Factor $\leq 85\%$. Max 500 operating hours annually.

Prime: Designed for continuous, peak load operations and emergency backup system at varying load in the event of normal utility power interruption. With 10% overload capability for a maximum of 1 hour in every 12 hours and average Load Factor $\leq 75\%$. Unrestricted operating hour.

Applicable Standard

Generator sets design, assembly and testing meet or exceed international standards, including IEC 34-1, BSEN60034, BS5000, ISO9001:2008, ISO14001:2004.

The power rating is set in accordance with ISO 8528, ISO 3046-1, GB/T2820-97 and NFPA110.

Structure Outline

The generator set has selected materials and equipment of high performance, which are durable and anti-vibration. The assembly work are fully accordingly to the quality control system. The single bearing alternator frame is coupled to the engine housing directly. With one end of the rotor is supported by bearing and the other end of rotor shaft is connected to the engine flywheel with a steel laminate plates.

The concept of the design and manufacturing is for easy operation and maintenance, to be compact and light weight. With the high level quality control system, we offer Reliability, Flexibility, and Economical power supply system to satisfy the demands from different kinds of application.

Advantage of VPower Genset

Designed, assembled and tested completely according to quality control system;

With industry-leading load factor (Standby $\geq 85\%$; Prime $\geq 75\%$);

With excellent load acceptance capacity of up to approx. 70%; significantly low fuel consumption; low emissions are derived by the high-pressure common rail fuel injection system;

Unique ADEC electronic control system, which have advantage on performance and maintenance;

With ESCM control system, excellent performance on high altitude application;

Advanced monitoring and communication systems, genset can operate from the island operation to grid parallel, fit with different operation.

Rubber Isolator Mounting

According to design and the rubber isolators are mounted between engine, alternator and its common skid base.

Applicable Conditions

Installation Place	: Indoor
Ambient Temperature	: 0°C ~ 40°C
Ambient Humidity	: < 99%
Altitude	: 100 m

Painting Color

Engine	: MTU Blue
Alternator	: Black
Generator Control Panel	: Black
Skid Base	: Black

* Materials and specifications are subjected to change without prior notice.

VGS3300

Open Type Generator Set



TECHNICAL DATA

50Hz / 1500RPM / 380-400V

ENGINE	Maker and Model		MTU 20V4000G63L
	Rating Type		Prime / Standby
	Engine Output (Prime / Standby)	HP	3521/ 3874
		kWm	2590/ 2849
	Engine Load Acceptance	kWe	~1680 (~70%)
	Aspiration		Turbocharged; Water Charge Air Cooling
	Cylinder Arrangement		20V
	Type		Water Cooled, 4 Cycles, Overhead Valve
	Bore x Stroke	mm x mm	170 x 210
	Piston Displacement	Liter	95.4
	Starting Method		Electric Motor, 24V – 9.0kW x 2
	Charging Alternator		DC 24V – 35A (Brushless)
	Cooling Fan and Diameter	mm	8 Blades Pusher Type, 1891
	Oil Cooler		Water Cooled, Multi-plate Type
	Air Cleaner		Dry Type, 2 Stage Paper Element
	Stop Solenoid		Energized to Run Mode
	Flywheel Housing / Flywheel		SAE #00 / SAE #21 (Metric Tread)
	Flywheel Ring Gear Teeth		182
	Battery (Lead Acid Type)		DC 12V – 200Ah x 4 pcs
	Frequency Regulation, Stead State	%	≤±0.5
	Frequency Regulation, Transient State	%	≤±10
	Frequency Stable Time	s	2
	Frequency Waving	%	≤±0.25
Frequency Regulation Range	%	±5.0	
ENGINE LUBRICANT	Oil Pan (High / Low Level)	Liter	340 / 245
	Oil Filter /By-pass Filter	Liter	50
	System Total	Liter	390
	Grade		SAE #15W-40 API, Class CH, CI
ENGINE COOLANT	Radiator and Ambient Temp.	°C	Corrugate Fin Type, 40
	Cooling System		Forced Circulation by Centrifugal Water Pump
	Engine Capacity	Liter	260
	Radiator Capacity	Liter	380
	Radiator Heat Rejection	kW	1760
ENGINE DATA	Pressure Mean Effective (PME)	bar	23.9
	Mean Piston Speed	m/s	10.5
	Sound Level (Average at 1m)		
	Full Load	dB(A)	109
	Speed Regulation	%	Electronically controlled injection; Common Rail System
	Thermostat (Wax Type)		
	Water Coolant	°C	Cracking 79, Fully Open 87
	Engine Shutdown Device		
	Coolant Temp (Sensor Type)	°C	102 + 3%
Oil Pressure (Sensor Type)	kPa	98 + 3% (1.0 + 3% bar)	
FUEL CONSUMPTION	BSFC (at 100% Load)	g/kWh	192
	Lubricating Oil (Nominal Value)	%	0.3
	Fuel Rate	Liter/h	599

* Materials and specifications are subjected to change without prior notice.

VGS3300

Open Type Generator Set



TECHNICAL DATA

50Hz / 1500RPM / 380-400V

ALTERNATOR	Model		LSA53.2 M9
	Construction		Single Bearing, Self-Ventilated
	Control System		D510C AVR with AREP+PMI Excited
	Insulation		Class H
	Protection		IP23
	Rated Power Factor		0.8
	Efficiency (Cont. 100%)	%	96.3
	No of Pole and Phase		4 Poles 3 Phase 4 Wire
	Stator Winding		Double Layer lab
	Winding Pitch		2/3
	Winding Leads		6
	Voltage Regulation, Stead State	%	≤±0.5
	Voltage Regulation, Transient State	%	+20 ~ - 15
	Voltage Stable Time	s	≤0.5
	Voltage Waving	%	≤±0.5
	Voltage Regulation (at No Load)	%	95 ~ 105
	Voltage Waveform Distortion		
	No Load	%	<1.5
	Non-Distorted Balanced Linear		
	Load	%	<5
	Maximum Overspeed	rpm	1800
Telephone Interference	%	THF<2 / TIF<50	
Voltage Dip at 15%	kVA	~2700kVA	
Voltage Dip at 20%	kVA	~3750kVA	
AIR VENTILATION	Combustion Air Flow	m3/min	192
	Cooling Fan Air Flow	m3/min	2,400
	Alternator Air Flow	m3/min	168
	Total	m3/min	2760
EXHAUST GAS	Gas Flow (at Full Load)	m3/min	510
	Temperature (at T/C Outlet)	°C	545
	Allowable Back Pressure	mbar	85
	Bellow Size (Inner Diameter)	mm	250 x 3
RECOMMEND	Diesel Fuel (Grade)		ASTM D975, 1-D or 2-D
	Pipe Size of Fuel Line		
	Supply (Minimum)	Inch	2
	Return (Minimum)	Inch	1.5
GENERATOR CONTROL PANEL	Genset Controller		Deep Sea DSE7320
	Analog Measurement	°C	Coolant Temperature
		Bar	Engine Oil Pressure
		PRM	Engine Speed
		V	Battery Voltage
		Hrs	Hour Run
		%	Fuel Level (Optional)
	AC Measurement	V	Gen U1 – U3
		A	Gen I1 – I3
		Hz	Gen Frequency
		kW	Gen Active Power
		kVAr	Gen Reactive Power
		kWh	Gen Power Consumption
		V	Mains U1 – U3
		Hz	Mains Frequency
	V	Mains Voltage (L1-L2, L2-L3, L3-L1)	

* Materials and specifications are subjected to change without prior notice.

TECHNICAL DATA

50Hz / 1500RPM / 380-400V

GENERATOR CONTROL PANEL	Default Protection Settings	
	Low Oil Pressure	Bar < 1.5
	High Coolant Temperature	°C > 100
	Over Speed	RPM > 10% of RatedSpeed
	Fail to Start	Sec. > 39 (failed to start up after 3 attempts)
	Low / High Battery Voltage	V 18 / 30
	Charge Fail	V < 18
	Under / Over Gen Voltage	V 70% / 110% of Rated Voltage
	Under / Over Gen Frequency	Hz 85% / 110% of Rated Frequency
	Over Current	A > 120%(IDMTL)
	Push Buttons	
	MODE →	Selection of Genset operation mode (OFF, MAN, AUT push button)
	HORN RESET	Deactivates the "HORN"
	FAULT RESET	Acknowledges faults and alarms
	START	Start Genset
	STOP	Stop Genset
	MCB ON/OFF	Manual open/close the Mains CB
	PAGE	Cyclic selection of the display mode (MEASUREMENT ◀ ▶ ADJUSTMENT)
	△	Select set point, screen or increase set point value
	▽	Select set point, screen or decrease set point value
✓	Confirm set point value	
LED's (from left to right)		
<p>MAINS FAILURE: Green LED activated when the mains present, green LED unlit while 'mains failure' occurred and Genset does not run.</p> <p>MCBON: Green LED activated if MCB is closed. It actuated by feedback signal.</p> <p>GCBON: Green LED activated if GCB is closed. It actuated by feedback signal.</p> <p>GEN VOLTAGE PRESENT: Green LED activated when the genset present, green LED unlit while 'genset output failure' or genset does not run.</p>		
Emergency Stop Button	Stop Genset in case of emergency	
Key Switch	ON/OFF Power to the control panel	
LED	Common Engine Fault LED	
Buzzer	Audible alarm	

* Materials and specifications are subjected to change without prior notice.


V500 GENSET CONTROL SYSTEM

- ◆ Genset Output Data Display and Protection
- ◆ Genset Status Display and Protection
- ◆ Genset Remote Start-up and Auto Start-up
- ◆ Power Monitoring System
- ◆ Fault LED Indicators
- ◆ Modular design and expandable

Deep Sea DSE7320 Genset Control System Features:

DSE 7320 controller features with multiple functions for Genset control, operation and protection. It provides logical control and Graphical LCD display, interfacing with RS232 and RS485 for local or remote applications. These features include:

- (1) Auto/Manual Start-Stop
- (2) Phase sequence detects and protection
- (3) 38*78 LCD display
- (4) Genset overspeed protection
- (5) Oil pressure display and protection
- (6) Coolant Temperature display and protection
- (7) DC Volt measurement and Over/Under Volt protect
- (8) Fuel Level detects and alarm
- (9) Lube Oil Timer
- (10) Electrical Measurement
 - a. Active Power
 - b. Reactive Power
 - c. Voltage(L-L/L-N)
 - d. Frequency
 - e. Line Currents
 - f. kWh
 - g. kVAh
- (11) Protections:
 - a. Over/Under Voltage
 - b. Over/Under Frequency
 - c. IDMT Over-current
- (12) LED Indicator for audio / visuals alarm
- (13) Hour-run meter
- (14) Over 200 Event Log
- (15) Including 1 x USB port for PC configuration

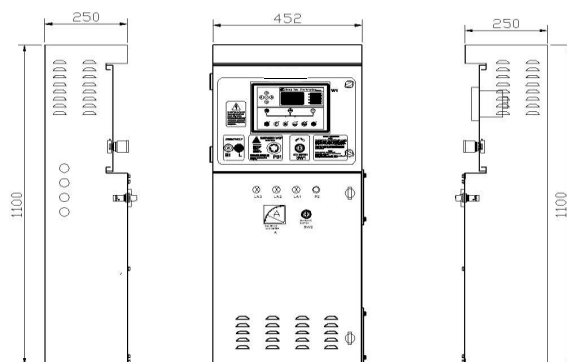

* Materials and specifications are subjected to change without prior notice.

VGS3300

Open Type Generator Set




Rated Power (kWe/kVA)

Generator (Maker / Model)	Voltage	Prime Power Rating Output								
		Without Cooling System			Radiator Driven by Fan Pulley			Radiator Driven by Fan Motor		
		kWe	kVA	AMPS	kWe	kVA	AMPS	kWe	kVA	AMPS
AVK LVSI 804T	380V	2316	2895	4399	2316	2895	4399	2241	2801.25	4256
	400V	2440	3050	4402	2440	3050	4402	2365	2956.25	4267
	415V	2440	3050	4243	2440	3050	4243	2365	2956.25	4113
Leroy Somer / LSA53.2 M9	400V	2400	3000	4330	2400	3000	4330	2325	2906.25	4195
AVK HVSI 804W	11kV	2492	3115	163	2443	3054	160			
Leroy Somer LSA54XL85	11kV	2400	3000	157	2400	3000	157			
Leroy Somer LSA 53.2 XL13	6.3kV	2480	3100	284	2451	3064	281			
AVK MV 804T	3.3kV	2499	3123.75	547	2451	3064	536			
Generator (Maker / Model)	Voltage	Standby Power Rating Output								
AVK LVSI 804T	380V	2544	3180	4832	2544	3180	4832	2469	3086.25	4689
	400V	2680	3350	4835	2680	3350	4835	2605	3256.25	4700
	415V	2680	3350	4661	2680	3350	4661	2605	3256.25	4530
Leroy Somer / LSA53.2 M9	400V	2640	3300	4763	2640	3300	4763	2565	3206	4628
AVK HVSI 804W	11kV	2738	3423	180	2690	3362.5	176			
Leroy Somer LSA54XL85	11kV	2520	3150	165	2520	3150	165			
Leroy Somer LSA 53.2 XL13	6.3kV	2604	3255	298	2604	3255	298			
AVK MV 804T	3.3kV	2744	3430	600	2695	3369	589			

* cos phi =0,8

Generator Set layout, Dimensions and Weight

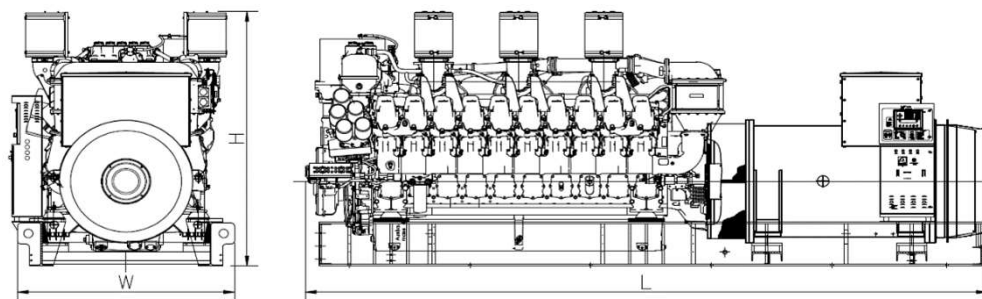

Genset Model	Weight (kg)	Dimensions (LxWxH) mm
VGS3300	17500	5800 X 1800 X 2320

Optional Accessories

- ✘ Base frame fuel tank or separate fuel tank
- ✘ 50°C radiator for high amb. temp. (available for open type, standard for enclosure type)
- ✘ Automatic changeover switch (ATS)
- ✘ Deif, ComAp or other famous brand controller
- ✘ ABB, Schneider, Siemens or other famous brand circuit breakers
- ✘ Adjustable earth fault protection and earthing connection w/main CB
- ✘ Adjustable fuel level sensor
- ✘ Genset manual oil pump
- ✘ Genset fuel oil cooler
- ✘ Genset radiator heater/fuel oil heater/lub oil heater
- ✘ Genset automatic fuel supply system
- ✘ Genset anti-freeze heater
- ✘ Genset DE housing-RTD/thermistors/PT100
- ✘ Other genset accessory upon special request.

**VPOWER GROUP
INTERNATIONAL HOLDINGS LIMITED**

HONG KONG HEADQUARTERS
UNITS 2019-25, TOWER 1, METROPLAZA
223 HING FONG ROAD
HONG KONG

SINGAPORE OFFICE
65 CHULIA STREET #48-01
OCBC CENTRE
SINGAPORE 049513

VPOWER
we power your vision

e-mail: info@vpower.com